

Electronics Row-Column Devices

Terry Sturtevant

Wilfrid Laurier University

February 13, 2019

Row-Column Devices

Row-Column Devices


- Often switches and LEDs will be arranged in a matrix, such as on a keypad or dot-matrix display.


Row-Column Devices

- Often switches and LEDs will be arranged in a matrix, such as on a keypad or dot-matrix display.
- Rather than having a pin for each element, having pins for each row and column reduces the total number needed.


Row-Column Devices


- Often switches and LEDs will be arranged in a matrix, such as on a keypad or dot-matrix display.
- Rather than having a pin for each element, having pins for each row and column reduces the total number needed.
- This requires *strobing* in order to work.







LED matrix





Telephone keypad





LED 8 lighted

LED matrix operation

LED matrix operation


- 1 Set the bit for the first column HIGH, and all others LOW.


LED matrix operation

- 1 Set the bit for the first column HIGH, and all others LOW.
- 2 Set the bits for each of the rows LOW where you want an LED on, and set the others HIGH.


LED matrix operation


- 1 Set the bit for the first column HIGH, and all others LOW.
- 2 Set the bits for each of the rows LOW where you want an LED on, and set the others HIGH.
- 3 Repeat for each column.

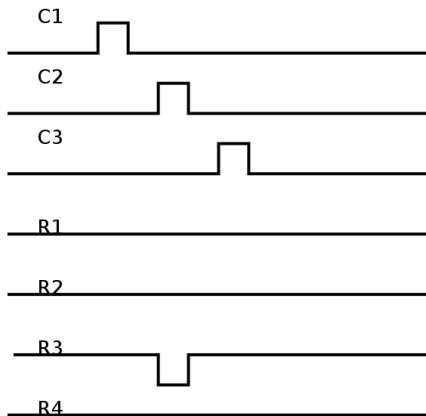

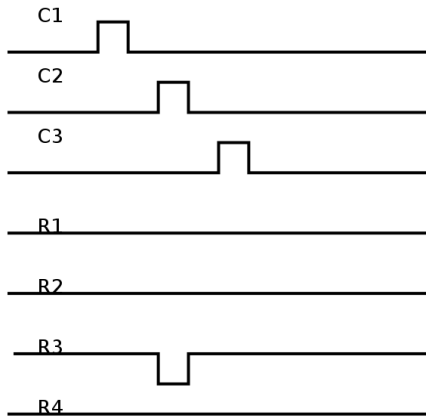

Signals to light '8' LED

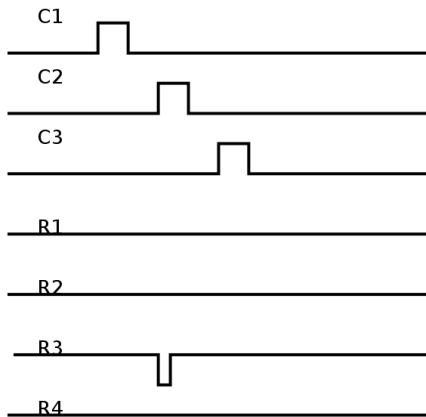

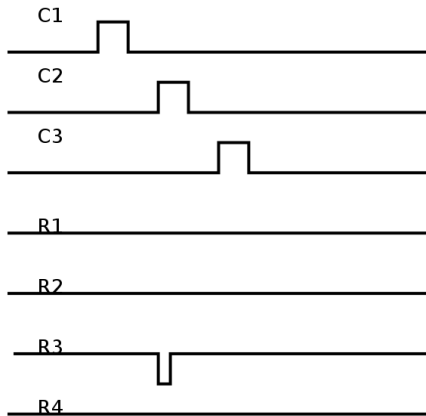

PWM makes it possible to dim the LED as well.

Keypad matrix operation

Keypad matrix operation

- 1 Set the bit for the first column HIGH, and all others LOW.

Keypad matrix operation

- 1 Set the bit for the first column HIGH, and all others LOW.
- 2 Read the bits for the rows.

Keypad matrix operation

- 1 Set the bit for the first column HIGH, and all others LOW.
- 2 Read the bits for the rows.

A HIGH indicates the row where a switch was pressed, and LOWs indicate rows where switches were not pressed.


Keypad matrix operation


- 1 Set the bit for the first column HIGH, and all others LOW.
- 2 Read the bits for the rows.
A HIGH indicates the row where a switch was pressed, and LOWs indicate rows where switches were not pressed.
- 3 Repeat for each column.

Keypad matrix operation


- 1 Set the bit for the first column HIGH, and all others LOW.
- 2 Read the bits for the rows.
A HIGH indicates the row where a switch was pressed, and LOWs indicate rows where switches were not pressed.
- 3 Repeat for each column.


Note: Pulldown resistors will be needed on the rows, even though they are not shown.







Telephone keypad with pull-down resistors on rows





Key 6 pressed

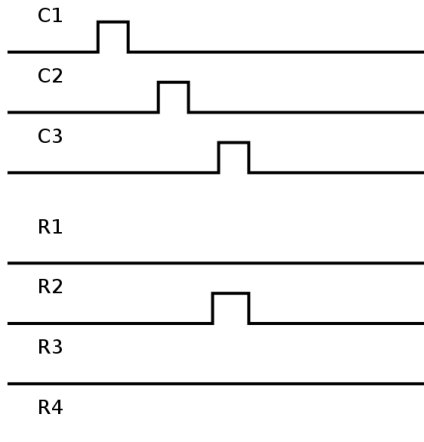

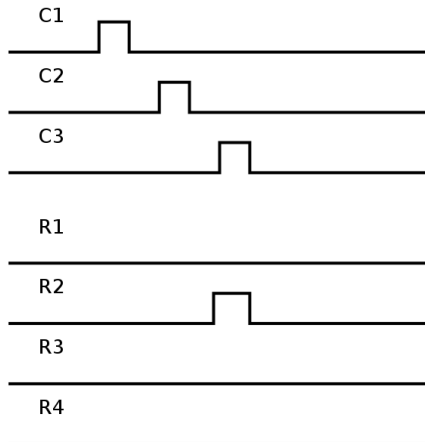

Signals when '6' key is pressed