



APPLICATION NOTE

- SINGLE INLINE PACKAGE (SIP) RESISTOR NETWORK
- DUAL INLINE PACKAGE (DIP) SWITCH

- PINOUTS

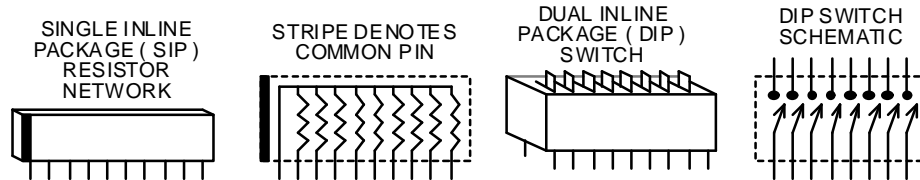

- TYPICAL CIRCUIT

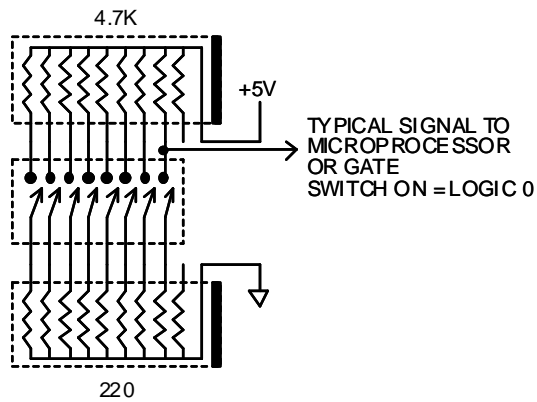

ELECTRICAL NOTES:

- CTS 770 SIP RESISTOR NETWORK
 - 0.1 W MAXIMUM PER RESISTOR ELEMENT
 - $\pm 2\%$ TOLERANCE
 - ± 100 PPM/ $^{\circ}$ C
- CTS 208-8 DIP SWITCH
 - $0.050\ \Omega$ AFTER 5,000 CYCLES
 - 0.050 A @ 50 V MAXIMUM

27 FEB 98
BOB LINEBERRY
BRADLEY DEPT. OF ELECTRICAL & COMPUTER ENGINEERING
VIRGINIA TECH